

**CleanJet™ No-Pipe System** prevents stagnant water and bacteria build-up, thereby reducing the risk of infections and disease caused by contaminated piped foot spas. Quiet, clean and maintenance free, the CleanJet™ uses 50% less energy to operate.

**LED Color Therapy** installed in every bowl offers a tranquil, relaxing atmosphere. You and your clients will discover the many benefits of colour therapy. Effects of colored lights have a positive impact on health and well-being.



**Powerful Discharge** (optional) will automatically drain quickly and quietly. Self primed discharge system is activated automatically when drain is opened. Factory installed to give consistent, reliable service.

**Ozonator** is an option that is available to give the added security and safety of complete sanitation. Ozone is 200 times stronger than household bleach, yet safe and gentle enough to use in the foot bath. It is made naturally from oxygen and reverts back to oxygen when its work is done. Ozone is automatically introduced into the water when system is turned on killing 99% percent of all disease causing bacterium. After only a few minutes of ozone treated hydromassage, clients feel a sense of lightness due to improved circulation and reduced muscular tension.

**Fully Adjustable Footrest** provides technician and client custom fit and comfort. Adjustable four ways. Front to back, up and down for ultimate positioning of legs and feet. Client will be totally and completely comfortable still allowing the technician to work at ease.

**Luxurious Seating** for ultimate comfort. Beautiful design has power recline and slide. Chair will swivel and arms lift for easy access from either side of spa. Soft, plush luxurious texture with the added benefit of soil and stain resistance. Manufactured to provide protection in medical and health care environments. Easy to clean with mild soap and water.

Weight	350 lbs (130 kg)
Shipping Weight	420 lbs (157 kg)
Tub Capacity	5 US gal. (19 L)
Water Source	1/2" pipe thread fitting hot and cold. Must meet local plumbing codes. Normal water pressure of 30 - 120 PSI required. Backflow preventer V00275 installed.
Drain Source	1-1/4" drain. 1/2" if discharge installed. Must meet local plumbing codes using schedule 40 drain pipe and appropriate traps.
Electrical	Whirlpool CleanJet™ 1/5hp 120V 1.5AMP 60hz. Discharge pump 110V 5.5AMP 60hz. Must meet local codes. Ground fault interrupter required.
Warranty	Gulfstream warrants to the original purchaser, that the LaFleur Spa will be free from defects during the limited 3 year warranty period. See operations manual for complete warranty details.

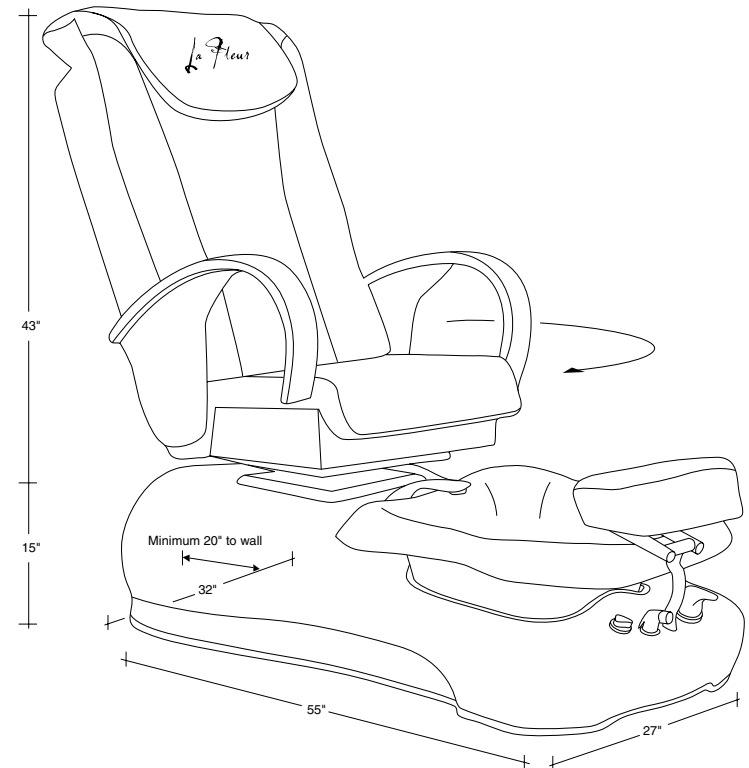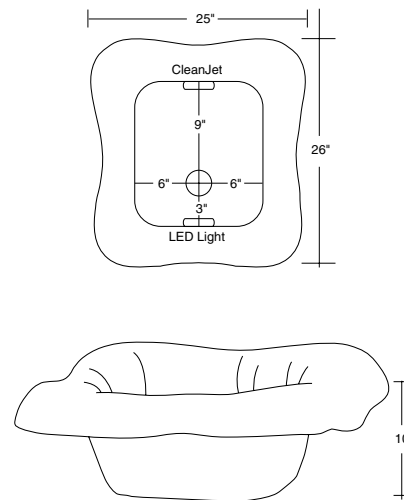

We continue to develop new and improved products. Therefore, all specifications are subject to change without notice. 2005. Gulfstream Plastics™ and CleanJet™ are trademarks of Gulfstream Plastics Ltd. Patent pending.



**LUCITE®**  
The source of inspiration

*La Fleur*  
spas

1-877-622-4853

www.gulfstreamplastics.com